




PUMP PERFORMANCE

S75MB SERIES

16 GPM #16
3600 rpm 60Hz

FLOW RANGE: 10 - 20
OPERATE WITHIN DESIGNATED
AREA ONLY

IMPORTANT: 20 PSI MINIMUM INLET PRESSURE REQUIRED.
PERFORMANCE IS BASED ON 3600 RPM AND 60 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON
REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED
PERFORMANCE @ 70 °F WATER TEMPERATURE, 1.0 SG,
GRAVITY.

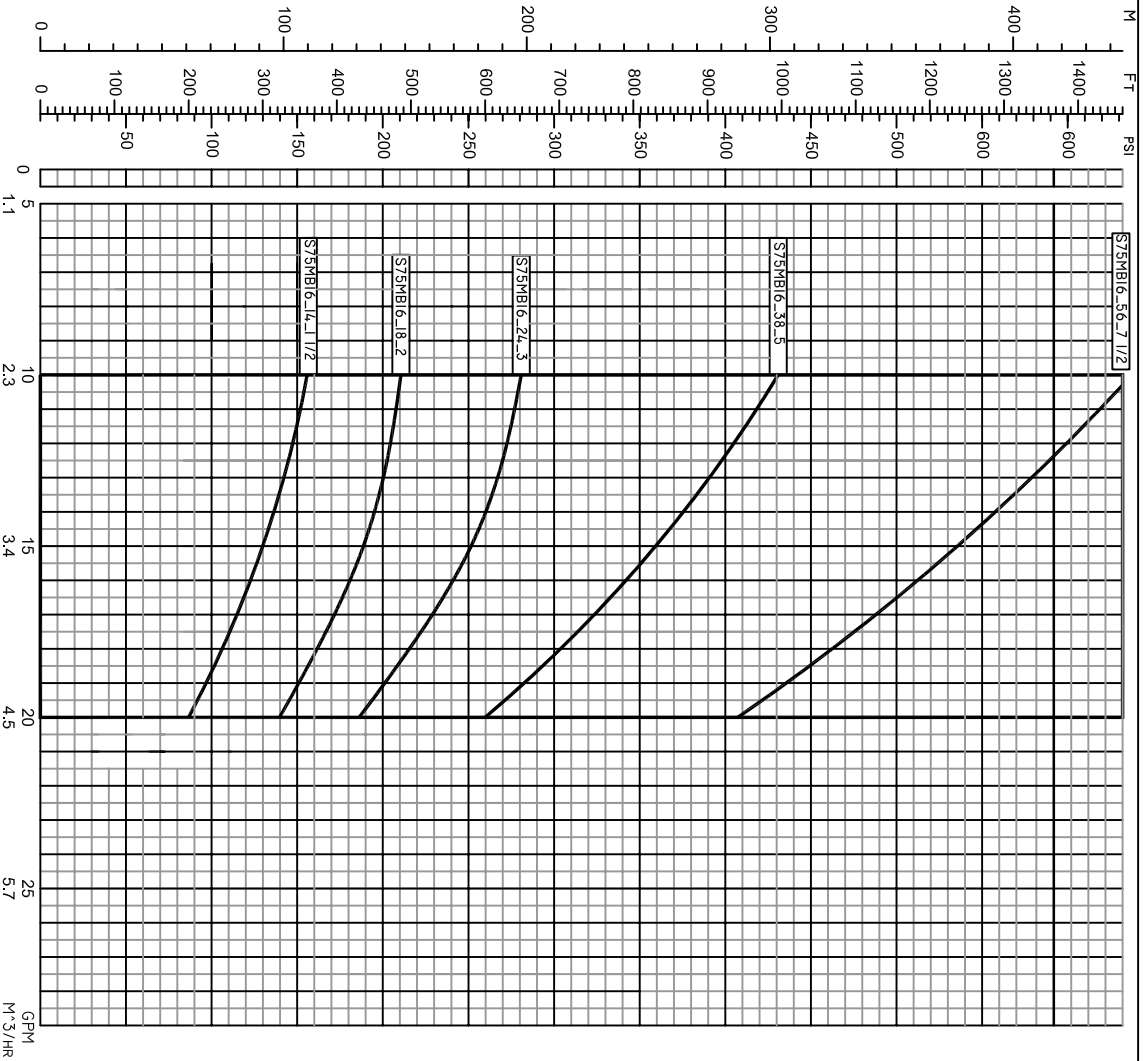

PERFORMANCE IS BASED ON 3600 (NOMINAL) RPM, 60 HZ MOTOR. THESE PUMP CURVES AND ANY INDIVIDUAL CURVES, WHICH ARE AVAILABLE UPON REQUEST, ARE TYPICAL ONLY AND ARE NOT GUARANTEED AS MINIMUM PERFORMANCE. IF EXACT FLOW AND PRESSURE ARE REQUIRED, A CERTIFIED CURVE MAY BE ORDERED AT ADDITIONAL COST IF ACCOMPANIED BY AN ORDER AND ONLY AFTER PUMP HAS BEEN TESTED.

MANUFACTURED BY : T&T PUMP CO. INC.
RT 8 BOX 343
FAIRMONT, WV 26554



SPECIFICATIONS SUBJECT TO
CHANGE WITHOUT NOTICE