


This drawing is an integral part of the general statement of use and Technical Manual

Shell	L	P, port	S#	M, mm/in	W		
length	(l.o.a.)	to port	(span)	length for	weight	Article	
code	mm.	mm.	mm.	membranes	kg.	number	
couc	inch	inch	inch	elements	lb.		
1	1612	1194	710	1032	65.6	811000-1	
1	63.5	47	28	40.6	144.6		
2	2628	2210	1550	2048	83.4	811000-2	
	103.5	87	61	80.6	184		
3	3644	3226	2550	3064	101.3	811000-3	
	143.5	127	100	120.6	223.3		
4	4660	4242	3250	4080	119.1	811000-4	
	183.5	167	128	160.6	262.6	811000-4	
5	5676	5258	4250	5096	137	811000-5	
	223.5	207	167	200.6	302	811000-3	
6	6692	6274	5250	6112	154.8	811000-6	
	263.5	247	207	240.6	341.3	811000-0	
7	7708	7290	6250	7128	172.6	811000-7	
_ ′	303.5	287	246	280.6	380.7	011000-7	
8	8724	8306	7250	8144	190.5	811000-8	
"	343.5	327	285	320.6	420	011000-0	

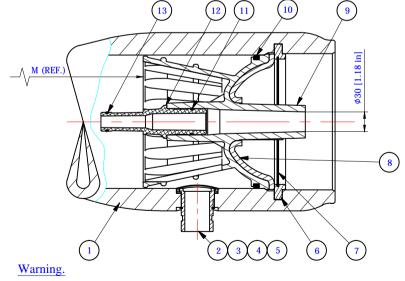

- 1. Never pressurize a pressure vessel that was not loaded with membrane elements.
- 2. Wrong manifolding may effect an excessive load on port what can lead to leaks.
- 3. Max. allowable working pressure not to exceed 1000 psi. (69 bar).
- 4. Permeate internal pressure not to exceed 125 psi. (8.6 bar).
- 5. Operating temperature not to exceed 49°C (120°F).

Notes:

- 1. All dimensions are for reference only, not for construction unless certified.
- 2. Item 14 & 15 should be located on feed side.
- 3. Drawing unit: mm. (inches)
- 4. Saddles can be shimmed if required.
- 5. Do not scale drawing, may be reprinted on any paper size or copied.
- 6. Length between ports (P) can be changed to adapt old dimension with customer's special request.
- 7. The vessel is supplied with two strap assembly

The vesser is supplied with two strap assembly.												
	Item	Part number	Q-ty	Title			Material					
-	1	811000-0	1	Body of Pressure Ve	ssel	Gla	Glass/Epoxy					
Ī	2	040-155-1200	2	F/C Port 1.5"		Su	Super Duplex Stainless Steel					
ı	3	006-156-1203	2	Disk for side port			1etal plate					
	4	014-150-0506	2	Seal for side port		EP	PDM					
	5	011-150-1202	4	Retaining ring for sid	le port	Sta	stainless steel					
	6	005-861-1200	2	Support ring			Aluminum					
	7	011-801-1202	2	Retaining ring (finger hook)								
ı	8	285213006	2	Metal cap			Metal plate					
	9	285779010/v/g	2	End cap			Ingineering plastic					
	10	007-080-0092	2	Seal for End cap			EPDM					
ı	11	285773918	2	Seal for Adapter			PDM					
	12	As required	2	Adapter			ngineering plastic					
ı	13	As required	2-4	Membrane seal			PDM					
	14	285779231	0-3	Disk spacer - 1 mm.			ngineering plastic					
	15	285779233	0-7	Disk spacer - 3 mm.			ngineering plastic					
	16	55410310	2	Strap Assy.			Stainless steel					
	17	55410351	2-3	Saddle			Ingineering plastic					
BEL	DEI	BEL 8-S	-1000	psi.	DESIG	N	Daria P.	10/11/2011				
		SURE	VESSEL	CHECK		Yuri V.	10/11/2011					
DRAWING No. 8s15-1000							Ari A.	10/11/2011				

THIS DRAWING IS PROPERTY OF BEL GROUP LIMITED IT IS STRICTLY FORBIDDEN TO USE, COPY, REPRODUCE OR DISCLOSE ANY PART OF IT TO THIRD PARTY WITHOUT WRITTEN AUTHORIZATION